



PAINT STIRRER

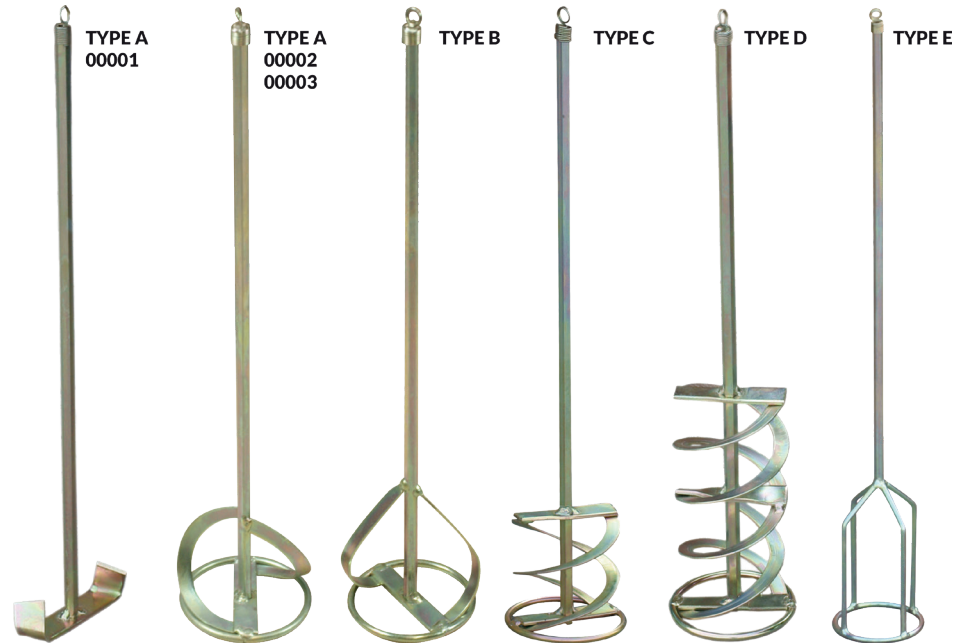

PRODUCT FEATURES

Professional quality. Galvanised steel. Rod with various endings: hexagonal: (type a, b, c, d, e) or sds plus (type c) or with m14 thread (type c, e). Hanger. Type A – FOR PAINTS (emulsion, acrylic, dispersion paints, varnishes, wood stains and all-purpose paints), recommended mixing speed 300-500 rpm. Type B – FOR SEMI-LIQUID MATERIALS (jointless floors, self-levelling compound, bituminous compounds: binders, abizol, dysperbit), recommended mixing speed 300-600 rpm. Type C – FOR THICK MATERIALS (thinset mortar, glues for thermal insulation, structural plaster, plaster, masonry mortar and concrete), recommended mixing speed 200-500 rpm. Type D – FOR HEAVY MORTARS (thinset mortar, glues for thermal insulation, structural plaster, plaster, masonry mortar and concrete), recommended mixing speed 200-500 rpm. The work part is twice longer than for C type. Type E – FOR GYPSUM (gypsum, gypsum plaster, putty coat), recommended mixing speed 200-500 rpm.

CODE	
00001	10
00002	10
00003	10
00004	10
00005	10
00006	10
00007	10
00008	10
00013	10
00014	10
00009	10
00010	10
00011	10
00012	10
00015	10