



**PAINT STIRRER**

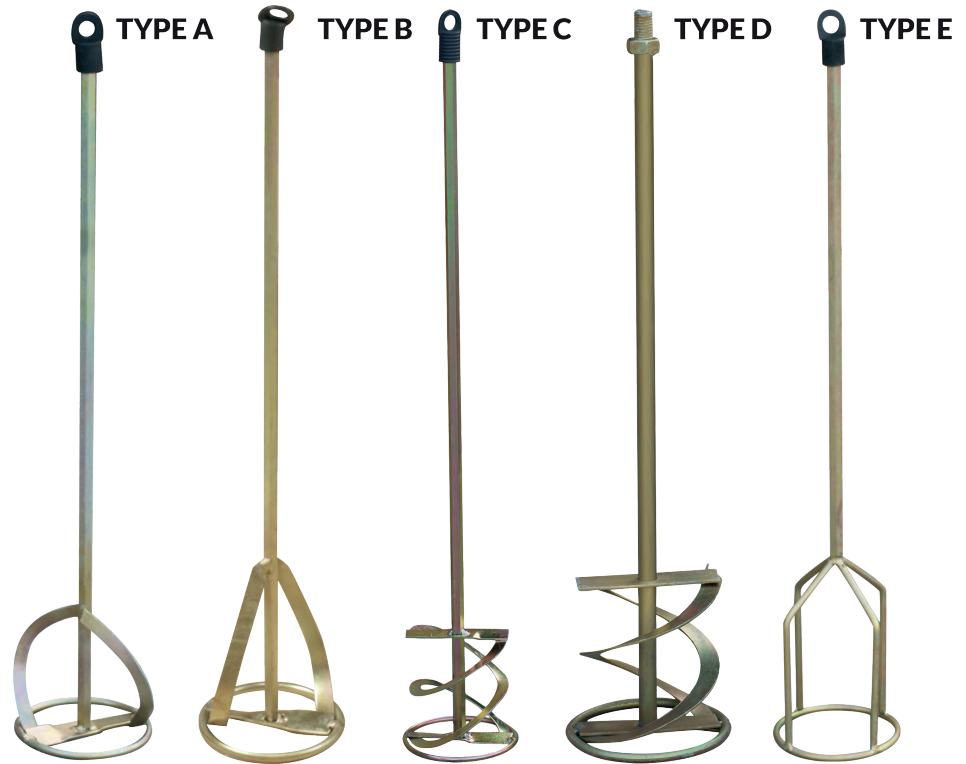

**PRODUCT FEATURES**

Professional quality. Galvanised steel. Rod with various endings: hexagonal (type a, b, c, e) or with m14 thread ( type d, e). Hanger. Type A – FOR PAINTS (emulsion, acrylic, dispersion paints, varnishes, wood stains and all-purpose paints), recommended mixing speed 300-500 rpm. Type B – FOR SEMI-LIQUID MATERIALS (jointless floors, self-levelling compound, bituminous compounds: binders, abizol, dysperbit), recommended mixing speed 300-600 rpm. Type C – FOR THICK MATERIALS (thinset mortar, glues for thermal insulation, structural plaster, plaster, masonry mortar and concrete), recommended mixing speed 200-500 rpm. Type D – FOR HEAVY MORTARS (thinset mortar, glues for thermal insulation, structural plaster, plaster, masonry mortar and concrete), recommended mixing speed 200-500 rpm. The work part is twice longer than for C type. Type E – FOR GYPSUM (gypsum, gypsum plaster, putty coat), recommended mixing speed 200-500 rpm.

CODE	TYPE	DIAMETER X L [MM]	MIXED MATERIAL MASS [KG]	ROD END	
41022	Type A	80 x 400	5 - 15	hexagonal - 8 mm	50
41023	Type A	100 x 500	5 - 20	hexagonal - 10 mm	50
41024	TYPE B	80 x 400	5 - 15	hexagonal - 8 mm	50
41025	TYPE B	100 x 500	5 - 25	hexagonal - 10 mm	50
41003	Type C	80 x 400	10 - 20	hexagonal - 8 mm	10/60
41004	Type C	100 x 600	10 - 40	hexagonal - 10 mm	10/40
41014	Type D	120 x 540	16 - 35	M14	24
41011	Type E	80 x 530	5 - 15	hexagonal - 8 mm	50
41012	Type E	100 x 540	12 - 30	hexagonal - 10 mm	24
41015	Type E	120 x 600	16 - 35	M14	24